





- For steep attachment with extremely short vehicle overhangs
- 1,500 kg lifting capacity with 1,000 mm load distance
- 2,000 kg lifting capacity with 750 mm load distance
- Four-cylinder lifting mechanism with low installation depths and four different lifting arm lengths
- Design with aluminium or steel platform
- Large selection of special equipment available

LOAD DIAGRAM

MBB C 1500 SZ		MBB C 2000 LZ	
a (mm)	Q (kg)	a (mm)	Q (kg)
1,000	1,500	750	2,000
1,200	1,250	900	1,650
1,500	1,000	1,100	1,300
1,850	800	1,600	950
2,400	600	2,400	600



STEEP ATTACHMENT SITUATIONS WITH 1,500/2,000 KG LIFTING CAPACITY

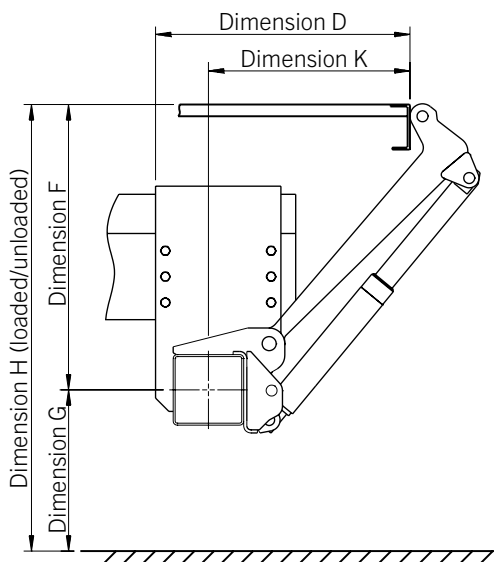

WEIGHTS

Aluminium platform type

Platform width (mm)	2,500
Platform height (mm)	
1,850	547 kg
2,100	569 kg

Steel platform type

Platform width (mm)	2,500
Platform height (mm)	
2,009	735 kg
2,109	785 kg

DIMENSIONS

Lifting arm lengths (mm)	750	800	850	950
H (max.) loading height, unloaded	1,340	1,416	1,505	1,657
H (min.) loading height, loaded	1,127	1,165	1,204	1,281
F (max.) middle of main beam to upper edge of loading floor	858	904	967	1,061
K (min.) at dimension F (max.)	413	434	410	444
D (min.) installation dimension, minimum	563	584	560	594
F (min.)	742	780	819	896
K (max.) at dimension F (min.)	602	635	666	730
D (max.) installation dimension, maximum	752	785	816	880

TECHNICAL DATA

Type	MBB C 1500 SZ	MBB C 2000 LZ
Lifting capacity	1,500 kg	2,000 kg
Main beam	180 x 180 mm	180 x 180 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders	
Platform overlap with floor	-63 mm	-63 mm
Lifting arm pitch	1,300 mm	1,300 mm
Load centre, longitudinal	1,000 mm	750 mm
Load centre, across centre	Central, 50% of rated load on one side	
Inclination angle of the platform	+ 90° to -10°	+ 90° to -10°

